



Benchmarking state-of-the-art optical simulation methods for analyzing large nanophotonic structures

Gregersen, Niels; de Lasson, Jakob Rosenkrantz; Frandsen, Lars Hagedorn; Kim, Oleksiy S.; Breinbjerg, Olav; Wang, Fengwen; Sigmund, Ole; Ivinskaya, Aliaksandra; Lavrinenko, Andrei; Gutsche, Philipp

Total number of authors:
13

Published in:
Proceedings of XXVI International Workshop on Optical Wave & Waveguide Theory and Numerical Modelling.

Publication date:
2018

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Gregersen, N., de Lasson, J. R., Frandsen, L. H., Kim, O. S., Breinbjerg, O., Wang, F., Sigmund, O., Ivinskaya, A., Lavrinenko, A., Gutsche, P., Burger, S., Häyrynen, T., & Mørk, J. (2018). Benchmarking state-of-the-art optical simulation methods for analyzing large nanophotonic structures. In *Proceedings of XXVI International Workshop on Optical Wave & Waveguide Theory and Numerical Modelling*. (pp. 9-9). [O-3.1] TU Dortmund University.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Benchmarking state-of-the-art optical simulation methods for analyzing large nanophotonic structures

Niels Gregersen^{1*}, Jakob Rosenkrantz de Lasson¹, Lars Hagedorn Frandsen¹, Oleksiy S. Kim²,
Olav Breinbjerg², Fengwen Wang³, Ole Sigmund³, Aliaksandra Ivinskaya⁴, Andrei Lavrinenko¹,
Philipp Gutsche⁵, Sven Burger⁵, Teppo Häyrynen¹ and Jesper Mørk¹

¹ DTU Fotonik, Department of Photonics Engineering, Technical University of Denmark

² DTU Elektro, Department of Electrical Engineering, Technical University of Denmark

³ DTU Mekanik, Department of Mechanical Engineering, Technical University of Denmark

⁴ ITMO University, St. Petersburg, Russia

⁵ Zuse Institute Berlin, Germany

* ngre@fotonik.dtu.dk

Five computational methods are benchmarked by computing quality factors and resonance wavelengths in photonic crystal membrane L5 and L9 line defect cavities. Careful convergence studies reveal that some methods are more suitable than others for analyzing these cavities.

Geometry under study

The photonic crystal (PhC) membrane represents a platform for planar integration of components, where cavities and waveguides may play a key role in realizing compact optical components. A finite-length defect waveguide forms an L_n cavity, where n denotes the length of the cavity. Such L_n cavities support spectrally discrete optical modes, and the fundamental cavity mode profile of an L9 cavity is shown in Fig. 1. Light may be confined to such an L_n cavity for extended periods, as quantified by the quality (Q) factor. The Q factor thus represents a key parameter in the design of a PhC membrane cavity.

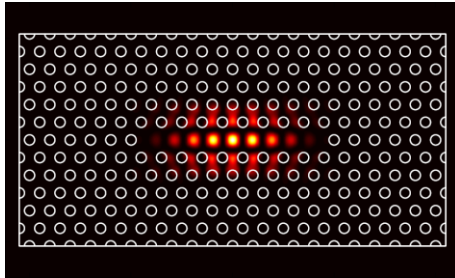


Fig. 1: Optical field $|E_y|^2$ profile for the L9 cavity mode.

Table 1: Calculated Q factors and resonance wavelengths λ .

	FDTD	FDFD	FEM	SIE	FMM
λ^{L5} (nm)	1568	1572	1571	1572	1567
λ^{L9} (nm)	1574	1580	1578	1579	1570
Q^{L5}	1670	1725	1705	1707	1700
Q^{L9}	104,000	108,000	105,000	104,000	60,000

Methods and results

The combination of the large size of the PhC L_n cavity and the full 3D nature of the geometry makes the calculation of the cavity Q factor an extremely demanding numerical challenge. In this work, we focus on two structures, a low-Q L5 cavity and a high-Q L9 cavity. We employ five different computational methods, the finite-difference time-domain (FDTD) technique, the finite-difference frequency-domain (FDFD) technique, the finite-element method (FEM), the surface integral equation (SIE) approach and the Fourier modal method (FMM), to compute the cavity Q factor and the resonance wavelength for both structures. For each method, the relevant computational parameters are systematically varied to quantify the computational errors. The final results summarized in Table 1 show that the resonance wavelengths agree fairly well for the two geometries among the five methods. On the other hand, significant deviations are observed for the Q factor. Our study highlights the importance of careful convergence checks and systematic estimation of the computational error, both of which are generally missing in the literature.